Prepared for:

Castillo Construction 5041 North Cimarron Road Las Vegas, Nevada 89149

Post Asbestos Abatement Inspection Report Silver Peak Community Center Silver Peak, Nevada

Prepared by:

BROADBENT & ASSOCIATES, INC. 8 West Pacific Avenue Henderson, Nevada 89015 (702) 563-0600 www.broadbentinc.com



June 22, 2023

Project No. 22-01-194-201



June 22, 2023 Project No. 22-01-194-201

Castillo Construction 5041 North Cimarron Road Las Vegas, Nevada 89149

Attn: Mr. Eduardo Castillo

Re: Post Asbestos Abatement Inspection Report, Silver Peak Community Center, Silver Peak,

Nevada.

Dear Mr. Castillo:

Please find attached the report entitled *Post Asbestos Abatement Inspection Report, Silver Peak Community Center, Silver Peak, Nevada*. Should you have questions regarding the work performed or results obtained, please do not hesitate to contact us at (702) 563-0600.

Sincerely,

BROADBENT & ASSOCIATES, INC.

Jeremy Holst, IJPM-1559 (exp. 8/1/23) Nevada Asbestos Abatement Consultant

cc. Stefanie Costa Rica, BEC Environmental, Inc. stefanie@becnv.com
Sara Nimsgern, Alliance Environmental Group, LLC. Saranimsgern@alliance-enviro.com
Maureen Glennen, Esmeralda County. mglennen@esmeraldacountynv.org
Emory La Rue, Esmeralda County Public Works. escopw@gmail.com

Ruben Ramos-Avina, Nevada Division of Environmental Protection. rramos-avina@ndep.nv.gov

TABLE OF CONTENTS

		<u>Page</u>
1.0	Introduction	1
2.0	Building Material Inspection Report	1
3.0	Post Asbestos Abatement Inspection Activities	1
4.0	Closure	3

FIGURES

Figure 1: Site Location Figure Figure 2: Sample Location Figure

APPENDICES

Appendix A: State of Nevada Asbestos Abatement Licenses

Appendix B: Rotometer Calibration Documentation

Appendix C: Laboratory Analytical Results and Chain-of-Custody Documentation

1.0 INTRODUCTION

Asbestos abatement activities were performed at the Silver Peak Community Center (Center) located in Silver Peak, Nevada (Property). The abatement activities were performed to remove asbestos containing materials (ACM) in preparation for renovations to the Center. Broadbent and Associates, Inc. (Broadbent) was contracted by Castillo Construction to provide inspection activities subsequent to completing the abatement of ACM at the Center. Work was executed in accordance with a Broadbent proposal dated May 10, 2023. This report serves to document visual observations and air sampling data obtained during the performance of the post asbestos abatement inspection activities at the Property. Figure 1 depicts the location of the Property.

2.0 BUILDING MATERIAL INSPECTION REPORT

The abatement of ACM was performed based on the results of a building material inspection performed by McGinley and Associates. Findings of the inspection were documented in a McGinley and Associates report dated April 1, 2022, entitled *Limited Pre-renovation Asbestos and Lead-based Paint Survey, Three Esmeralda County Community Centers, Esmeralda County, Nevada* (Inspection Report). The Inspection Report identified asbestos in the texture and joint compound associated with the drywall ceiling system throughout the Center. The abatement activities were performed to remove the asbestos containing drywall ceiling system throughout the Center to allow for renovation activities to be performed.

3.0 POST ASBESTOS ABATEMENT INSPECTION ACTIVITIES

Asbestos abatement activities documented in this report were performed by Alliance Environmental Group, LLC (Alliance), a subcontractor to Castillo Construction. Inspection activities performed by Broadbent to evaluate the successful removal of the asbestos containing drywall ceiling system were performed on May 25 and May 26, 2023. The activities included the performance of a visual inspection to evaluate for remnant ACM and air clearance monitoring to allow for building re-occupancy. The inspection activities were performed by Mr. Evan Robinson. Management of the project was provided by Mr. Jeremy Holst of Broadbent. Mr. Robinson and Mr. Holst are licensed through the Nevada Occupational Safety and Health Administration (OSHA) Asbestos Control Program. Copies of Mr. Robinson's and Mr. Holst's State of Nevada Asbestos Abatement licenses are provided in Appendix A.

Prior to performing the abatement activities, a negative pressure containment within a regulated area was setup in the Center by Alliance. On May 25, 2023, upon completing the abatement of the asbestos containing drywall ceiling system, Broadbent inspected the regulated area for remnant ACM. Minor remnant ACM was identified by Broadbent during the visual inspection. The remnant ACM observed was removed at the time of the visual inspection by representatives of Alliance. Remnant ACM was not identified subsequent to the completion of the visual inspection activities performed by Broadbent on May 25, 2023.

On May 26, 2023, subsequent to passing the visual inspection and after the containment area fully dried, final air clearance monitoring was performed in accordance with Nevada Administrative Code (NAC) 618.956 and 29 Code of Federal Regulations (CFR) 1926.1101 Appendix A. The air clearance monitoring included setting up five air stations within the containment area at a height of approximately 5 feet above the surface of the floor. A flow rate of 10 liters of air per minute (LPM) was achieved utilizing high flow air pumps at each test station. The test period was two hours in duration thereby meeting the minimal air sample volume (1,200 liters) required under NAC 618.956. Air samples were collected on 25-millimeter mixed cellulose ester filter membranes as specified in 29 CFR 1926.1101 Appendix A. Aggressive sampling methods (i.e. leaf blower) were utilized during the air clearance testing.

A rotometer calibrated with a primary standard in the last six months was used to evaluate the air flow of each pump at the start and completion of the sampling activities. The evaluation of the measurements showed the air flow did not change from the set limit of 10 LPM during the test period. A copy of the documentation for the calibration of the rotometer is attached as Appendix B.

In addition to the samples collected from the air stations setup in the Center, two field blank samples and one lot blank sample were collected in accordance with 29 CFR 1926.1101 Appendix A. The field blank samples were collected to evaluate if contamination occurred during sample handling. The field blank samples were collected by opening an unused filter cassette for approximately 30 seconds at the Property with no air being drawn through it. Upon closing the cassette, the field blank sample was handled and transported with the remaining sample cassettes to the laboratory. The lot blank sample was collected to evaluate if the factory-provided sample cassettes were contaminated prior to receipt. The sample was collected by selecting a random cassette from the box of cassettes received from the manufacturer and submitting it to the laboratory without opening for analysis.

The samples obtained during the air clearance monitoring were delivered under chain-of-custody procedures to SGS Forensic Laboratories in Las Vegas, Nevada. Analysis included airborne asbestos fibers by the National Institute for Occupational Safety and Health (NIOSH) 7400 Method. The analytical results obtained indicated the detected concentrations of fibers did not exceed the final clearance concentration standard of less than or equal to 0.01 fibers per cubic centimeter (f/cc). The table to follow depicts the results of the final air clearance sampling performed on May 26, 2023. Figure 2 depicts the locations at which the final air clearance samples were collected. The laboratory report generated by Forensic Laboratories is included as Appendix C.

Silver Peak Community Center


Sample Identification	Sample Type	Concentration (f/cc)
FC1/5-26-23	Clearance	<0.002
FC2/5-26-23	Clearance	<0.002
FC3/5-26-23	Clearance	<0.002
FC4/5-26-23	Clearance	<0.002
FC5/5-26-23	Clearance	<0.002
FB1/5-26-23	Field Blank	No Fibers Detected
FB2/5-26-23	Field Blank	0.5 Fibers Detected
LB1/5-26-23	Lot Blank	No Fibers Detected

f/cc – fibers per cubic centimeter

4.0 CLOSURE

The conclusion and recommendations presented in this report are based on the observations of our field personnel, the points investigated, and laboratory analysis provided by SGS Forensic Laboratories. Our services were performed in accordance with generally accepted standards of practice at the time this report was written. No warranty or guarantee of Property conditions is intended.

< - Less than





<u>LEGEND</u>


37.754527, -117.635391 GPS Coordinates of Building



Silver Peak Community Center 10 Montezuma Drive Silver Peak, Nevada



Figure No. 1
Site Location Figure

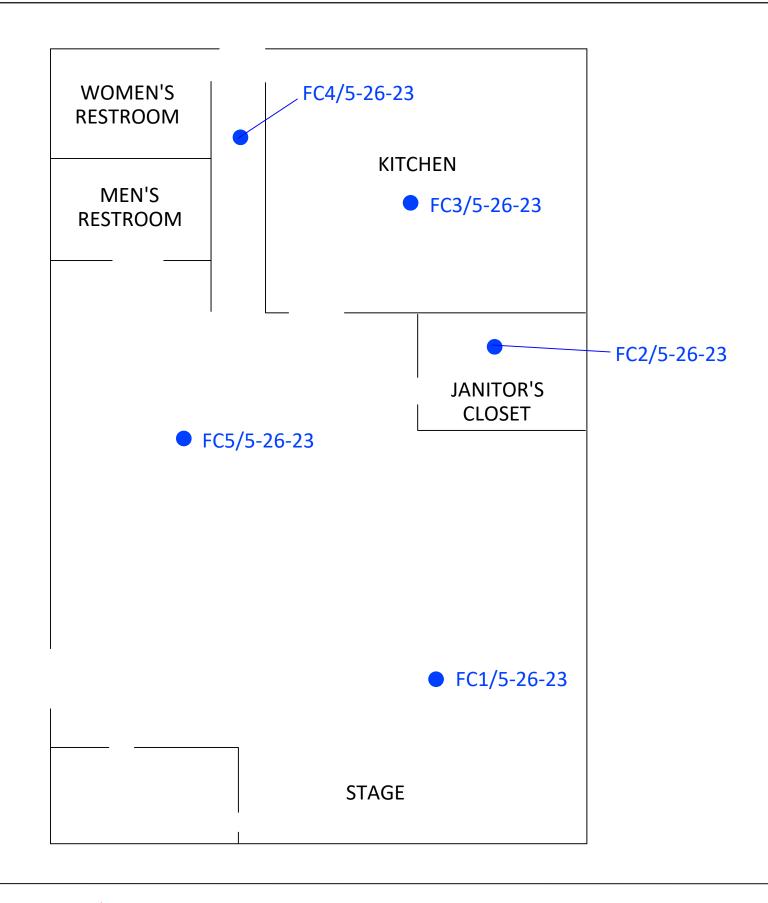

LEGEND

FC1/5-26-23





APPENDIX A

State of Nevada Asbestos Abatement Licenses

STATE OF NEVADA DEPARTMENT OF BUSINESS AND INDUSTRY

DIVISION OF INDUSTRIAL RELATIONS

Occupational Safety and Health Administration
Asbestos Control Program

Certifies That Evan Robinson

is Licensed As Asbestos Abatement Supervisor

License No. S-10161

Expiration Date 01/06/2024

Signature Of Licensee

STATE OF NEVADA DEPARTMENT OF BUSINESS AND INDUSTRY

DIVISION OF INDUSTRIAL RELATIONS
Occupational Safety and Health Administration
Asbestos Control Program

Certifies That Jeremy Holst
Broadbent & Associates Inc
is Licensed As Asbestos Abatement Consultant

License No. IJPM-1559

Expiration Date 08/01/2023

Signature Of Licensee Alle

APPENDIX B

Rotometer Calibration Documentation



Rotometer Calibration

 Broadbent & Associates, Inc.
 Client ID:
 7345

 Jeremy Holst
 Report Number:
 R002673

 8 West Pacific Avenue
 Date Received:
 05/15/23

 Date Calibrated:
 05/17/23

 Henderson, NV 89015
 Date Printed:
 05/17/23

A "best fit" curve of calibration data has been generated and appears below and is affixed to the rotometer. Rotometer readings and "actual values" taken from a primary standard may be read directly from the chart. All readings were taken from the middle of the ball with the rotometer in an absolute vertical position. For proper readings, the rotometer should be used in an identical position. Calibration performed on a DryCal Defender 510-H Primary Calibrator SN# 111563.

Sample ID: VR100325 Lab Number: VR100488

Comment:

Temperature: 78 °F

Barometric Pressure: 27.78 in Hg



Rotometer Calibration

 Broadbent & Associates, Inc.
 Client ID:
 7345

 Jeremy Holst
 Report Number:
 R002673


 8 West Pacific Avenue
 Date Received:
 05/15/23

 Date Calibrated:
 05/17/23

 Henderson, NV 89015
 Date Printed:
 05/17/23

A "best fit" curve of calibration data has been generated and appears below and is affixed to the rotometer. Rotometer readings and "actual values" taken from a primary standard may be read directly from the chart. All readings were taken from the middle of the ball with the rotometer in an absolute vertical position. For proper readings, the rotometer should be used in an identical position. Calibration performed on a DryCal Defender 510-H Primary Calibrator SN# 111563.

Actual Calib	ration Data	Regression of Data		
Rotometer Actual Readings Flow		05/17/23 78°F BP: 27.78 inHg		
(LPM)		VR100325		
` /	(LPM)	Rotometer Reading	Actual Flow	
2.0	1.7	(LPM)	(LPM)	
4.5	4.4	20.0	21.4	
7.0	7.1	19.5	20.9	
		19.0	20.3	
9.5	9.9	18.5	19.8	
11.0	11.5	18.0	19.2	
		17.5	18.7	
		17.0	18.1	
		16.5	17.6	
		16.0	17.0	
		15.5	16.5	
		15.0	15.9	
		14.5	15.4	
		14.0	14.9	
		13.5	14.3	
		13.0	13.8	
		12.5 12.0	13.2 12.7	
		11.5	12.7	
		11.0	11.6	
		10.5	11.0	
		10.0	10.5	
		9.5	9.9	
		9.0	9.4	
		8.5	8.8	
		8.0	8.3	
		7.5	7.7	
		7.0	7.2	
		6.5	6.6	
		6.0	6.1	
		5.5	5.5	
		5.0	5.0	



4.5

4.0

3.5

3.0

2.0

4.4

3.9

3.3 2.8

2.2

1.7 1.1 0.6



Rotometer Calibration

 Broadbent & Associates, Inc.
 Client ID:
 7345

 Jeremy Holst
 Report Number:
 R002673


 8 West Pacific Avenue
 Date Received:
 05/15/23

 Date Calibrated:
 05/17/23

 Henderson, NV 89015
 Date Printed:
 05/17/23

A "best fit" curve of calibration data has been generated and appears below and is affixed to the rotometer. Rotometer readings and "actual values" taken from a primary standard may be read directly from the chart. All readings were taken from the middle of the ball with the rotometer in an absolute vertical position. For proper readings, the rotometer should be used in an identical position. Calibration performed on a DryCal Defender 510-H Primary Calibrator SN# 111563.

VR100325

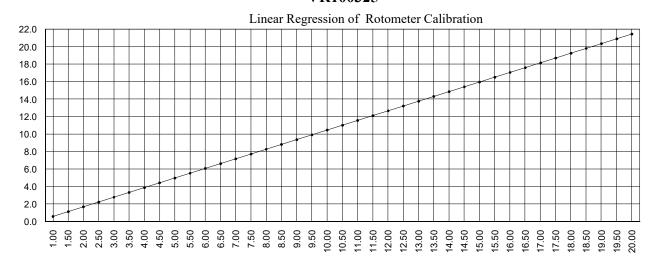

Vincent To, Laboratory Supervisor, Las Vegas Laboratory

APPENDIX C Laboratory Analytical Results and Chain-of-Custody Documentation



Airborne Fiber Analysis

NIOSH 7400 Method, Issue 3, 14 June 2019, counting rules 'A'


Jeremy Holst 8 West Pacific Henderson, N	V 89015	P. J. 22 01 1	104 201				Client ID: Report Num Date Receive Date Analyz Date Printed First Report	ed: 05/2 ed: 05/2 l: 05/2 ed: 05/2	7090 6/23 6/23 6/23 6/23
Job ID/Site:	Castillo Const. Silver	Park, 22-01-1	194-201				SGSFL Job I Total Sample Total Sample	es Submitted	
Sample ID		Lab Number	Date Collected	Volume (L)	Fibers	Fields	Fibers/mm ²	LOD F/cc	Fibers/cc
FC1/5-26-23		01334102	05/26/23	1200.0	0.5	100	<7.0	0.002	< 0.002
FC2/5-26-23		01334103	05/26/23	1200.0	2.0	100	<7.0	0.002	< 0.002
FC3/5-26-23		01334104	05/26/23	1200.0	1.5	100	<7.0	0.002	< 0.002
FC4/5-26-23		01334105	05/26/23	1200.0	2.5	100	<7.0	0.002	< 0.002
FC5/5-26-23		01334106	05/26/23	1200.0	2.5	100	<7.0	0.002	< 0.002
FB1/5-26-23		01334107	05/26/23	0.0	0.0	100			
Comments:	This result was used counted.	to blank corre	ect the other samp	ples on this rp	t. Blank	filters ar	e reported only	y as # of fibers	s & fields
FB2/5-26-23		01334108	05/26/23	0.0	0.5	100			
Comments:	This result was used counted.	to blank corre	ect the other samp	ples on this rp	t. Blank	filters aı	e reported only	y as # of fibers	s & fields
LB1/5-26-23		01334109	05/26/23	0.0	0.0	100			
Comments:	This result was used counted.	to blank corre	ect the other samp	ples on this rp	ot. Blank	filters ar	e reported only	y as # of fibers	s & fields



Airborne Fiber Analysis

NIOSH 7400 Method, Issue 3, 14 June 2019, counting rules 'A'

Broadbent & Associates, Inc	2.		Client ID:	7345	
Jeremy Holst			Report Number:	A307090	
8 West Pacific Avenue			Date Received:	05/26/23	
			Date Analyzed:	05/26/23	
Henderson, NV 89015			Date Printed:	05/26/23	
			First Reported:	05/26/23	
Job ID/Site: Castillo Con	st. Silver Park, 22-01-194-201		SGSFL Job ID:	7345	
			Total Samples Sub	omitted: 8	
			Total Samples Ans	alyzed: 8	
Sample ID	Lab Number Date Collected	Volume (L) Fibers	Fields Fibers/mm ² LOD	F/cc Fibers/cc	



Intralaboratory Relative Standard Deviation (Sr) per 100 graticule fields: 5 to 20 fibers: 0.41; >20 to 50 fibers: 0.37; >50 fibers: 0.26

Analytical results and reports are generated by SGS Forensic Laboratories (SGSFL) at the request of and for the exclusive use of the person or entity (client) named on such report. Results, reports or copies of same will not be released by SGSFL to any third party without prior written request from client. This report applies only to the sample(s) tested and results are based upon sample information provided by the client. Supporting laboratory documentation is available upon request. This report must not be reproduced except in full, unless approved by SGSFL. The client is solely responsible for the use and interpretation of test results and reports requested from SGSFL. This report must not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. Government. SGSFL is not able to assess the degree of hazard resulting from materials analyzed. SGS Forensic Laboratories reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified. Samples are not blank corrected unless otherwise noted. All samples were received in acceptable condition unless otherwise noted.

Note* Sampling data used in this report was provided by the client as noted on the associated chain of custody form.